



KM-1301SRJZ(3)

STACKABLE ICE CUBER



KM-1301SRJZ(3)
07/08/22
Item # 13662

W x D x H
48" x 27^{3/8}" x 27^{3/8}"

KM Edge
DESIGN

KM-1301SRJZ
Remote Air-Cooled 1 Phase
Shown on optional bin B-900

KM-1301SRJZ3 ★
Remote Air-Cooled 3 Phase



Item #: _____
Project: _____
Qty: _____
AIA#: _____

Features

- ▶ Individual crescent cube
- ▶ Stainless steel evaporator
- ▶ CycleSaver™ design 

- Up to 1433 lbs. of ice production per 24 hours
- Stackable for 2866 lbs. per 24 hours ice production in the same floor space
- Durable stainless steel exterior
- Protected by H-Guard Plus  Antimicrobial Agent
- EverCheck™ alert system 
- Removable air filters (Air-cooled model only)
- R-404A Refrigerant

Available on Bins:

B-800SF B-1150SS B-1500SS Top kit may be required.
B-900SF B-1300SS B-1650SS See Bin Spec Sheets.

Warranty:

3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping: (LxWxH) 51.75" x 33" X 33" Volume: 32.61ft³


Condenser	Model	ICE PRODUCTION		WATER USAGE		ELECTRICAL							
		Air / Water Temp Lbs. per 24 hours 70° / 50°F	90° / 70°F	Potable Gal. per 100 lbs. 90° / 70°F	Condenser Gal. per 100 lbs. 90° / 70°F	kWh Used per 100 lbs. 90° / 70°F	Max. Fuse Sz or HACR Circuit Bkr	Amperage	Voltage	Circuit Wires (including ground)	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
1 Phase Remote	KM-1301SRJZ	1400	1260	14.0	N/A	4.28	20A	15.9A	208-230V/60/1	4*	18,900	5 lbs. 15.2 oz. 10 lbs. 5.8 oz. [†]	295 / 335
3 Phase Remote	KM-1301SRJZ3	1433	1330	14.0	N/A	3.83	20A	12.8A	208-230V/60/3	4	18,800	5 lbs. 15.2 oz. 10 lbs. 5.8 oz. [†]	285 / 335

[†](with condenser)

*If neutral is not available, transformer kit (HS-5030) is required. Refer to Instruction Manual for installation and electrical requirements.

Power cord not included

KM Edge Cube Dimensions*



* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 187 - 253V

Service

- Panels easily removed and all components accessible for service.
- Allow 6" (15cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance/service.

Plumbing

- Icemaker Water Supply Line: Min. 3/8" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Min. 3/4" Nominal ID Hard Pipe or Equivalent

Line sets for Z models require brazing. Z model head must match Z model remote condenser.

Water Filter

Please refer to water filter spec sheet for recommended configurations. Hoshizaki reserves the right to change specifications without notice.




KM-1301SRJZ(3)


STACKABLE ICE CUBER

KM-1301SRJZ(3)
07/08/22
Item # 13662


FRONT VIEW

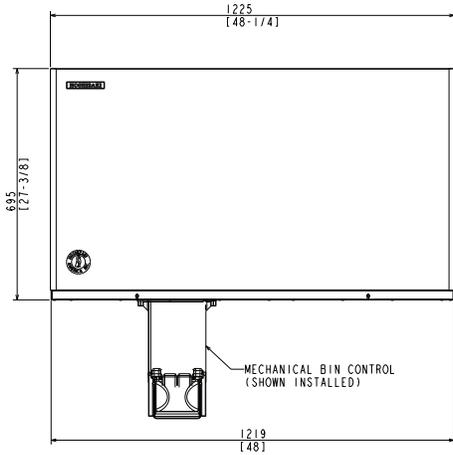


SIDE VIEW

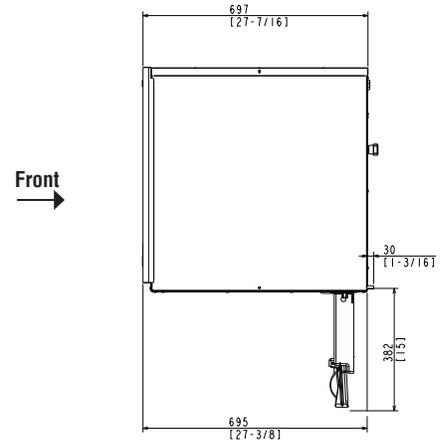

BACK VIEW

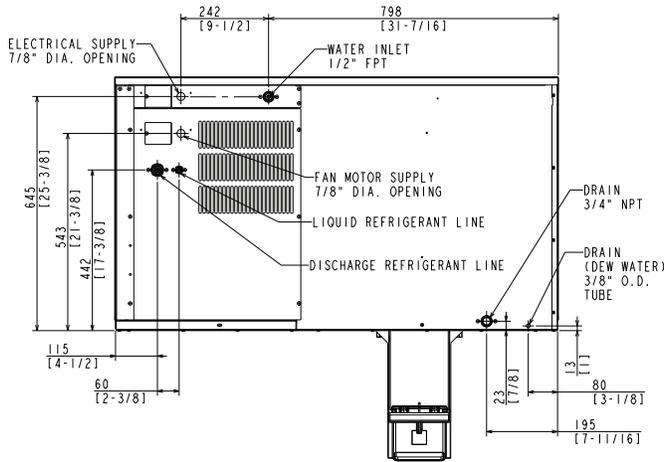

BOTTOM VIEW

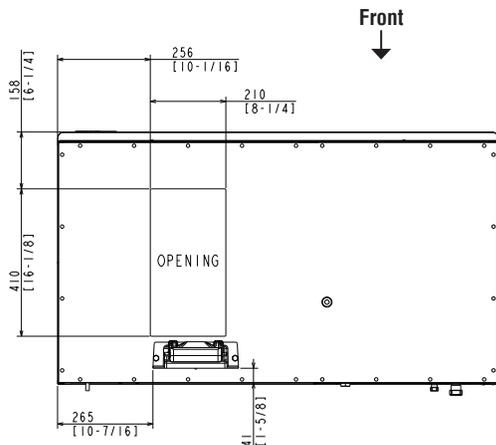

URC-14FZ Remote Condenser (Sold Separately)
(W x D x H) 35^{11/16} x 14^{1/16} x 36^{1/2}

For Use with KM-1301SRJZ(3)

Brazed Line Sets (Sold Separately)
25' HS-5604
35' HS-5605
55' HS-5606



Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

